

JINYU TIRE GROUP

HQ Add: 10th Floor, Block A, Platinum Plaza, No.5 Wenling Road, Laoshan District, Qingdao, China

Tel No.: 0086-400-600-7809

E-mail: TBR2@jinyutires.com

Website: www.jinyutires.com

TRUCK AND BUS TIRES
CATALOG 2022

ENTERPRISE INTRODUCTION

Enterprise Profile

JINYU Tire Group Co., Ltd. was founded in 1995, which is a professional tire R&D and manufacturing enterprise. The company has total assets of 5.5 billion Yuan and there are more than 3500 employees. By equipped with advanced tire production, research and development, testing equipment and professional technology, management team, the company has established a sound quality management system. There are two plants respectively located in China and Vietnam with total capacity of 6 million pcs/year. The company has set up sales centers in North America, Europe, Vietnam and other countries in local operation. The sales network covers more than 100 countries and regions in the Middle East, Asia, Europe, the United States, Africa and so on.

Jinyu Certificates

The company has obtained certificates like CCC, DOT, ECE, INMETRO, ISO/TS16949, GCC, SONCAP, TBS, SARS and so on. The company's laboratory has been certified by CNAS and ISO/IEC 17025 and obtained many national Patents.

Research and Development

The company believes proving excellent quality is a way of life and takes every opportunity to instill this value throughout the entire enterprise. As proof of this commitment, a considerable investment has been made in R&D over the last 20 years. The R&D center not only utilizes advanced equipment but also commits to having efficient operations and maintaining a strong teamwork culture. The team is hyper-focused on marketing, product planning, formula research and development, as well as, structure design and product testing.

Enterprise Mission

Concentrate on rubber tire technology and service development and application;
Commit ourselves to providing customers the best value and experience.

Enterprise Vision

To be the best tire supplier, trusted globally and able to provide the best value and experience to customers and end-users.

Jinyu firmly adheres to the enterprise spirit, "Common benefit is above all" and the company's target of "Providing the customers with excellent quality products and a high level of service." We insist on focusing on our customer's demands, committing to our promises, operating legally, and developing scientifically to maximize the common benefit of consumers, distributors, suppliers, employees, shareholders, communities, governments, enterprises and other related parties.

"Common benefit is above all"!



Hi, I'm JIMI

We are committed to becoming the most trusted and creative business partner in the world, providing customers with the most cost-effective products and the finest customer service.



Steer

P09 JF518
P10 JF568
P12 JY522

Drive


P14 JD565	P21 JY719
P15 JD575	P22 JD720
P16 JY711	P23 JD721
P17 JY958	P24 JD755
P18 JD571	P25 JD758
P19 JD577	P26 JD660
P20 JD727	P27 JD681









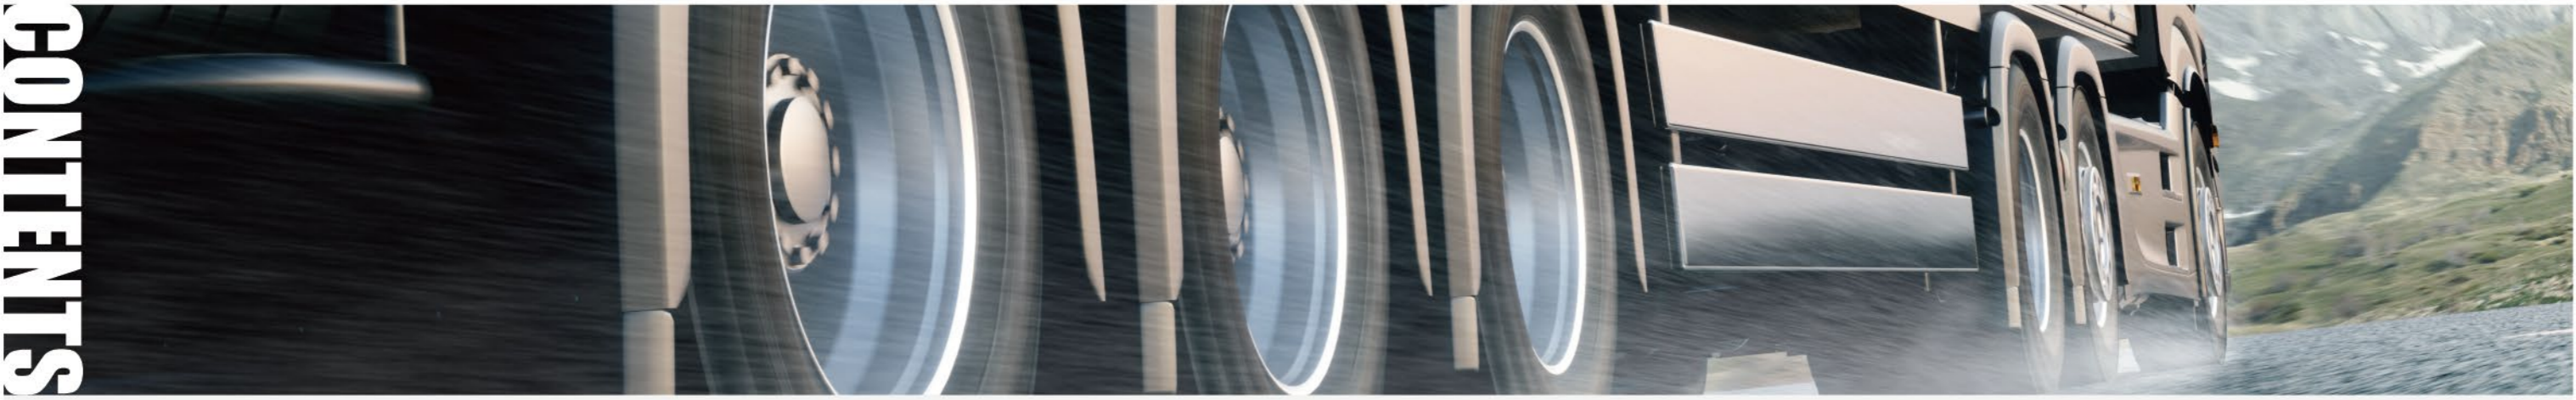







Trailer


P29 JT530
P30 JT560
P31 JT578
P32 JT586
P33 JY598
P52 JY529
P61 JW593

All-Position

P35 JA626	P43 JA526	P51 COACH
P36 JD690	P44 JA661	P54 JU555
P37 JA767	P45 JA665	P55 JU551
P38 JA511	P46 JD756	P56 JU558
P39 JY601	P47 JD766	P58 JW590
P40 JY602	P48 JD785	P59 JW591
P41 JY566	P49 JY716	P60 JW592
P42 JA525		



Steer	Drive	PATTERN REFERENCE	Trailer	All-Position
 P09 JF518	 P14 JD565 P19 JD577	 <div data-bbox="1530 886 1877 1079" style="background-color: #008080; color: white; padding: 10px; text-align: center;"> Long Haul </div>	 P29 JT530 P30 JT560  P31 JT578 P61 JW593	 P58 JW590 P59 JW591  P60 JW592
 P10-11 JF568 P12 JY522	 P15 JD575 P16 JY711  P17 JY958 P18 JD571  P22 JD720	 <div data-bbox="1530 1487 1877 1680" style="background-color: #008080; color: white; padding: 10px; text-align: center;"> Regional </div>	 P32 JT586 P33 JY598  P52 JY529	 P37 JA767 P38 JA511  P41 JY566

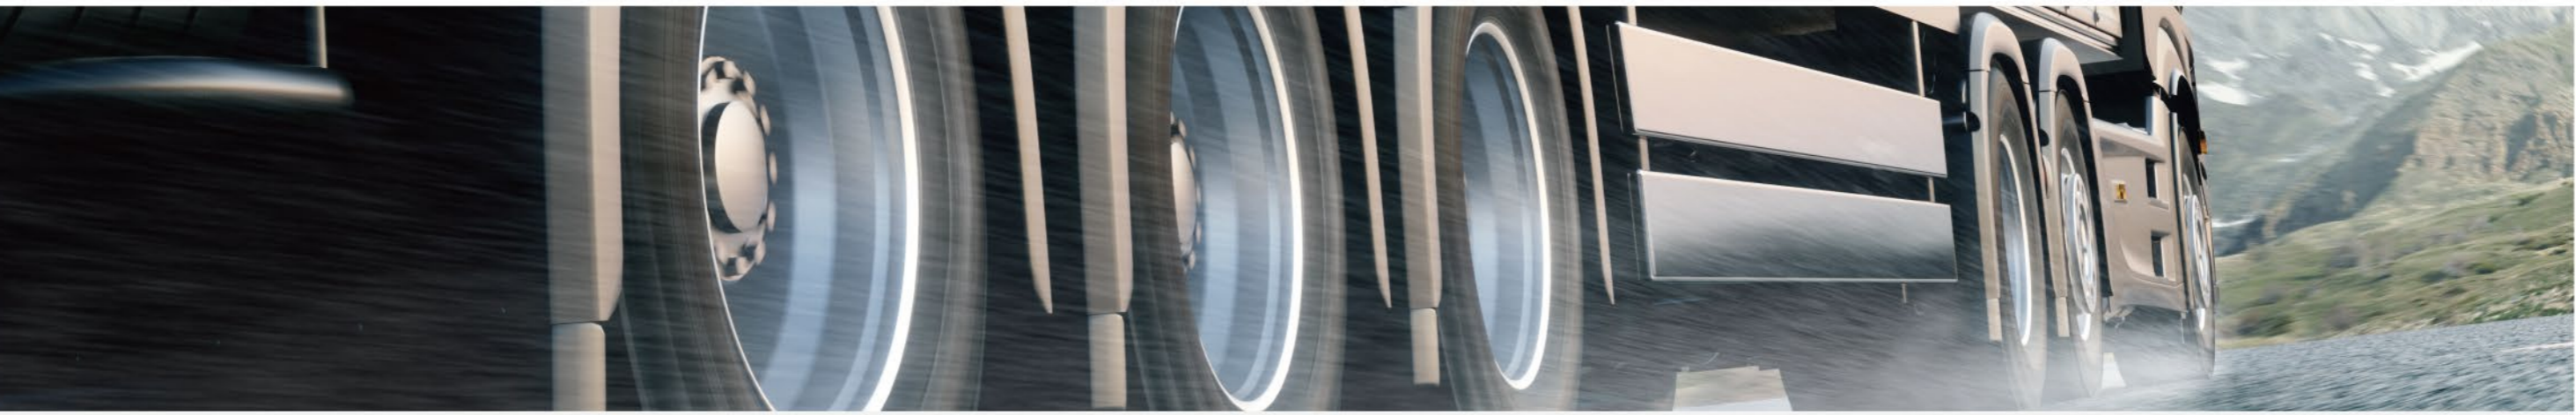

Drive

PATTERN REFERENCE

All-Position



P20 JD727 P21 JY719 P23 JD721 P24 JD755



P25 JD758 P26 JD660 P27 JD681



On&Off Road



P35 JA626 P36 JD690 P39 JY601 P40 JY602



P42 JA525 P43 JA526 P44 JA661 P45 JA665



Off Road



P46 JD756 P47 JD766 P48 JD785 P49 JY716




COACH/Urban




P51 COACH P54 JU555 P55 JU551 P56 JU558

STEER

- High Speed
- Reduced Noise
- High Durability
- High Strength

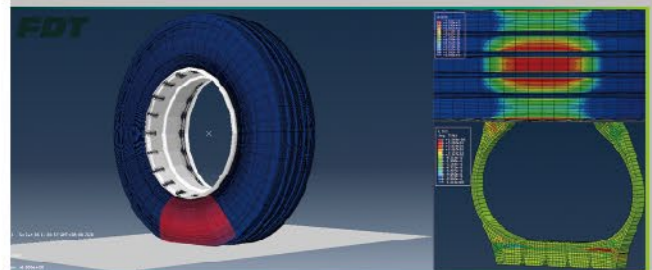

The Flat Distribution FEA Technology is adopted to control the deformation of tire carcass and belt layer, reducing the energy lag loss caused by tire deformation, optimizing rolling resistance, and saving the fuel consumption by 3-5% per 100km.

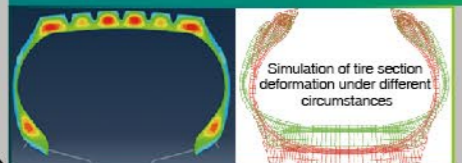

JF518

- Low noise emissions
- Good cost performance
- High wear-resistance
- Reduced fuel consumption



The adoption of Flat Distribution FEA Technology enables JF518 better rolling resistance (5% lower than JF568). Optimized outline design assure superb wear performance, providing longer mileage.



According to the theoretical wear volume calculation, compared with the actual performance of JF568. The mileage of JF518 is expected to increase by 15%.




Suitable



Origin CN/VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
• •	12R22.5	18	152/149 L	9.00	3550	3250	7830	7160	930	930	135	135	17	1085	300
• •	205/75R17.5	14	124/122 M	6.00	1600	1500	3525	3310	750	750	110	110	13	753	204
• •	215/75R17.5	16	135/133 L	6.00	2180	2060	4805	4540	860	860	125	125	12.5	767	211
• •	235/75R17.5	18	143/141 L	6.75	2725	2575	6005	5675	860	860	125	125	13	797	233
• •	245/70R17.5	16	136/134 M	7.50	2240	2120	4940	4675	850	850	123	123	13	789	248
• •	245/70R17.5	18	143/141 J	7.50	2725	2575	6005	5675	875	875	125	125	13	789	248
• •	225/70R19.5	14	128/126 L	6.75	1800	1700	3970	3750	760	760	110	110	12.5	811	226
• •	245/70R19.5	18	144/142 J	7.50	2800	2650	6175	5840	900	900	130	130	13	839	248
• •	265/70R19.5	18	143/141 J	7.50	2725	2575	6005	5675	900	900	130	130	13.5	867	262
• •	285/70R19.5	16	146/144 M	8.25	3000	2800	6610	6175	900	900	130	130	14	895	283
• •	285/70R19.5	18	150/148 K	8.25	3350	3150	7390	6945	900	900	130	130	14	895	283
• •	255/70R22.5	16	140/137 M	7.50	2500	2300	5510	5070	830	830	120	120	12.5	930	255
• •	275/70R22.5	16	148/145 M	8.25	3150	2900	6940	6395	900	900	130	130	15	958	276
• •	295/60R22.5	18	150/147 L	9.00	3350	3075	7390	6780	900	900	130	130	15	926	292
• •	295/80R22.5	18	152/149 M	9.00	3550	3250	7825	7165	900	900	130	130	16	1044	298
• •	315/60R22.5	18	152/148 L	9.75	3550	3150	7825	6945	900	900	130	130	15	950	313
• •	315/70R22.5	18	156/150 L	9.00	4000	3350	8820	7385	900	900	130	130	15.5	1014	312
• •	315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8050	850	850	120	120	16.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JF568

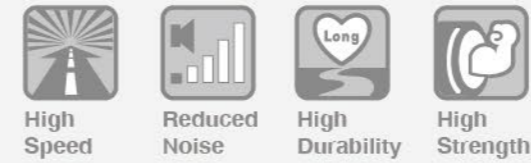


Origin CN VN	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	8.5R17.5	12	121/120 M	6.00	1450	1400	3195	3085	625	625	90	90	11	802	215	
•	9.5R17.5	16	131/129 L	6.75	1950	1850	4300	4080	830	830	120	120	13.5	842	240	
•	9.5R17.5	18	143/141 J	6.75	2725	2575	6005	5675	875	875	125	125	13.5	842	240	
•	10R22.5	16	144/142 L	7.50	2800	2650	6175	5840	900	900	130	130	14.5	1020	254	
•	•	11R22.5	16	148/145 M	8.25	3150	2900	6940	6395	840	840	120	120	15	1054	279
•	•	12R22.5	18	152/148 L	9.00	3550	3150	7825	6945	850	850	125	125	15	1085	300
•	•	13R22.5	18	154/151 K	9.75	3750	3450	8270	7605	830	830	120	120	17	1124	320
•	•	9R22.5	14	136/134 M	6.75	2240	2120	4940	4675	830	830	120	120	13.5	974	229
•	•	11R24.5	14	146/143 L	8.25	3000	2725	6610	6005	720	720	105	105	16.5	1104	279
•	•	11R24.5	16	149/146 L	8.25	3250	3000	7160	6610	830	830	120	120	16.5	1104	279
•	•	205/75R17.5	14	124/122 M	6.00	1600	1500	3525	3315	750	750	110	110	13	753	204
•	•	215/75R17.5	16	135/133 J	6.00	2180	2060	4805	4540	860	860	125	125	12.5	767	211
•	•	215/75R17.5	16	135/133 L	6.00	2180	2060	4805	4540	860	860	125	125	12.5	767	211
•	•	225/80R17.5	18	123/122 L	6.75	1550	1500	3415	3305	700	700	102	102	13.5	805	226
•	•	235/75R17.5	18	143/141 J	6.75	2725	2575	6005	5675	860	860	125	125	13	797	233
•	•	235/75R17.5	18	143/141 L	6.75	2725	2575	6005	5675	860	860	125	125	13	797	233
•	•	245/70R17.5	16	136/134 M	7.50	2240	2120	4940	4675	850	850	123	123	13	789	248
•	•	225/70R19.5	14	128/126 L	6.75	1800	1700	3970	3750	760	760	110	110	12.5	811	226
•	•	245/70R19.5	16	136/134 J	7.50	2240	2120	4940	4675	830	830	120	120	13	839	248
•	•	245/70R19.5	16	136/134 M	7.50	2240	2120	4940	4675	830	830	120	120	13	839	248

Origin CN VN	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)		
					(kgs)		(lbs)		(kPa)		(PSI)						
					S	D	S	D	S	D	S	D					
•	245/70R19.5	18	144/142 J	7.50	2800	2650	6175	5840	900	900	130	130	13	839	248		
•	•	265/70R19.5	16	140/138 M	7.50	2500	2360	5510	5205	760	760	110	110	13.5	867	262	
•	•	265/70R19.5	18	143/141 J	7.50	2725	2575	6005	5675	900	900	130	130	13.5	867	262	
•	•	285/70R19.5	18	150/148 K	8.25	3350	3150	7390	6945	900	900	130	130	13	895	283	
•	•	255/70R22.5	16	140/137 M	7.50	2500	2300	5510	5070	830	830	120	120	13.5	930	255	
•	•	275/70R22.5	16	148/145 M	8.25	3150	2900	6945	6395	900	900	130	130	14.5	958	276	
•	•	•	275/80R22.5	18	149/146 L	8.25	3250	3000	7160	6610	900	900	130	130	16	1012	276
•	•	•	295/60R22.5	18	150/147 L	9.00	3350	3075	7390	6780	900	900	130	130	14.5	926	292
•	•	•	295/75R22.5	14	144/141 L	9.00	2800	2575	6175	5675	760	760	110	110	16.5	1014	298
•	•	•	295/75R22.5	16	146/143 L	9.00	3000	2725	6610	6005	830	830	120	120	16.5	1014	298
•	•	•	295/80R22.5	18	152/149 M	9.00	3550	3250	7825	7165	900	900	130	130	16	1044	298
•	•	•	295/80R22.5	18	154/149 M	9.00	3750	3250	8270	7160	850	850	125	125	16	1044	298
•	•	•	315/60R22.5	18	152/148 L	9.75	3550	3150	7825	6945	900	900	130	130	14.5	950	313
•	•	•	315/70R22.5	18	156/150 L	9.00	4000	3350	8820	7385	900	900	130	130	15.5	1014	312
•	•	•	315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8050	850	850	120	120	16.5	1076	312
•	•	•	285/75R24.5	14	144/141 L	8.25	2800	2575	6175	5675	760	760	110	110	16.5	1050	283
•	•	•	285/75R24.5	16	147/144 L	8.25	3075	2800	6780	6175	830	830	120	120	16.5	1050	283

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY522

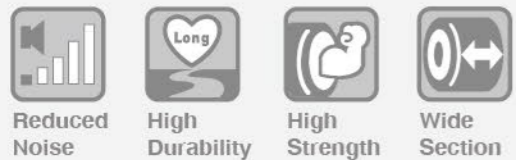

- Cool running
- Long tread life
- Low noise emissions
- High scrub resistance




Suitable



Origin CN VN	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	146/143 L	8.25	3000	2725	6610	6010	830	830	120	120	15.5	1054	279
•	12R22.5	18	152/149 K	9.00	3550	3250	7825	7165	930	930	135	135	16	1085	300
•	315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	16	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

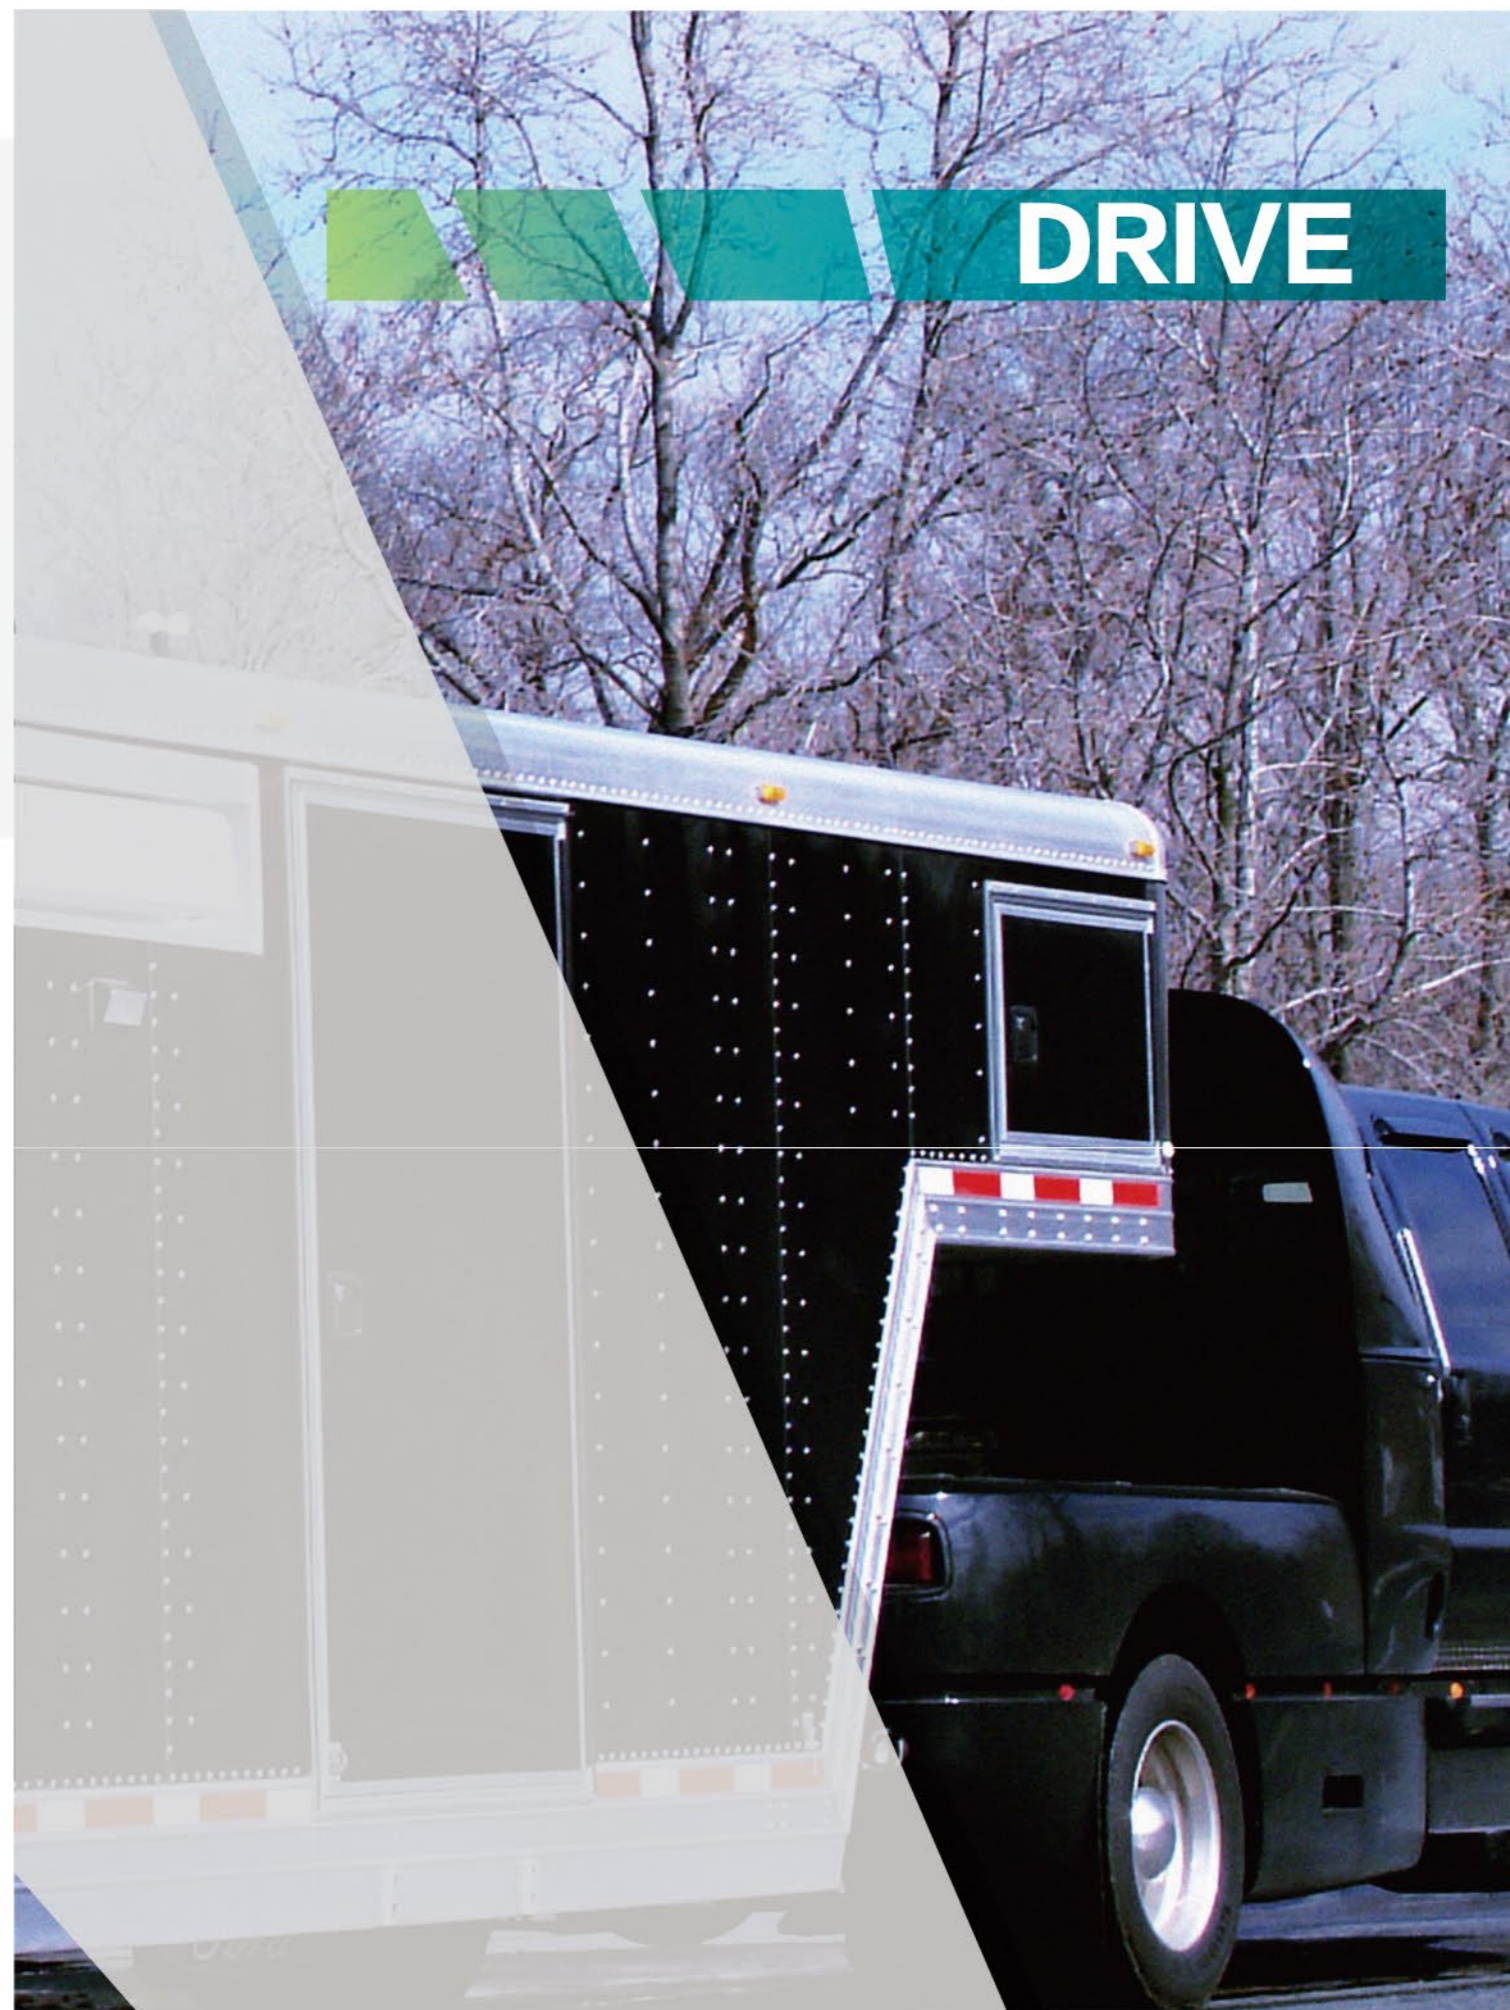

JD565



- High wear resistance
- Long tread life
- Economical and green
- Good cost-performance




Suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	295/80R22.5	18	152/149 L	9.00	3550	3250	7825	7165	900	900	130	130	17	1044	298
•	• 315/70R22.5	18	156/150 L	9.00	4000	3350	8820	7385	900	900	130	130	18	1014	312
•	• 315/80R22.5	18	156/150 L	9.00	4000	3350	8820	7385	900	900	130	130	18	1076	312
•	• 315/80R22.5	20	156/153 K	9.00	4000	3650	8820	8050	850	850	120	120	18	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD575

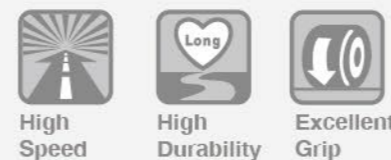

- Excellent traction
- High wear resistance



Suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	• 205/75R17.5	14	124/122 L	6.00	1600	1500	3525	3315	750	750	110	110	15	753	204
•	• 215/75R17.5	16	135/133 L	6.00	2180	2060	4805	4540	860	860	125	125	15	767	211
•	• 235/75R17.5	16	132/130 M	6.75	2000	1900	4410	4190	760	760	110	110	15	797	233
•	• 235/75R17.5	18	143/141 L	6.75	2725	2575	6005	5675	860	860	125	125	15	797	233
•	• 225/70R19.5	14	128/126 L	6.75	1800	1700	3970	3750	760	760	110	110	15	817	226
•	• 245/70R19.5	16	136/134 M	7.50	2240	2120	4940	4675	830	830	120	120	15.5	839	248
•	• 245/70R19.5	18	144/142 J	7.50	2800	2650	6175	5840	900	900	130	130	15.5	839	248
•	• 265/70R19.5	18	143/141 J	7.50	2725	2575	6005	5675	900	900	130	130	15.5	867	262
•	• 285/70R19.5	18	146/144 L	8.25	3000	2800	6610	6175	900	900	130	130	16	895	283
•	• 285/70R19.5	18	150/148 K	8.25	3350	3150	7390	6945	900	900	130	130	16	895	283
•	• 255/70R22.5	16	140/137 L	7.50	2500	2300	5510	5070	830	830	120	120	19.5	930	255
•	• 275/70R22.5	16	148/145 M	8.25	3150	2900	6945	6395	900	900	130	130	20	958	276
•	• 295/60R22.5	18	150/147 L	9.00	3350	3075	7390	6780	900	900	130	130	19	926	292
•	• 295/80R22.5	18	152/149 L	9.00	3550	3250	7825	7165	900	900	130	130	22	1044	298
•	• 315/60R22.5	18	152/148 L	9.75	3550	3150	7825	6945	900	900	130	130	20	950	313
•	• 315/70R22.5	18	156/150 L	9.00	4000	3350	8820	7385	900	900	130	130	20	1014	312
•	• 315/80R22.5	18	156/150 L	9.00	4000	3350	8820	7385	900	900	130	130	22.5	1076	312
•	• 315/80R22.5	20	156/153 K	9.00	4000	3650	8820	8050	850	850	120	120	22.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY711

- High Speed
- High Durability
- High Strength
- Excellent Grip

- Cool running
- Long tread life
- Excellent traction
- High scrub resistance



Suitable



Origin CN VN	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	146/143 L	8.25	3000	2725	6610	6010	830	830	120	120	21.5	1059	279
•	11R22.5	16	148/145 L	8.25	3150	2900	6940	6395	850	850	123	123	21.5	1059	279
•	12R22.5	18	152/149 K	9.00	3550	3250	7825	7165	930	930	135	135	22.5	1096	300
•	13R22.5	18	154/151 K	9.75	3750	3450	8270	7605	830	830	120	120	23.5	1124	320
•	315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	24.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY958

- High Speed
- High Durability
- Excellent Grip

- Long tread life
- Excellent traction



Suitable



Origin CN VN	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	146/143 K	8.25	3000	2725	6610	6010	830	830	120	120	19.5	1059	279
•	12R22.5	18	152/149 K	9.00	3550	3250	7825	7165	930	930	135	135	20	1096	300
•	315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	20	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD571



High Speed



High Durability



Excellent Grip



- Excellent traction
- High wear resistance

Suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	11R22.5	14	144/142 L	8.25	2800	2650	6175	5840	720	720	105	105	23.5	1059	279	
•	•	11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	23.5	1059	279
•	•	11R24.5	14	146/143 L	8.25	3000	2725	6610	6005	720	720	105	105	23.5	1110	279
•	•	11R24.5	16	149/146 L	8.25	3250	3000	7160	6610	830	830	120	120	23.5	1110	279
•	•	295/75R22.5	14	144/141 L	9.00	2800	2575	6175	5675	760	760	110	110	23.5	1020	298
•	•	295/75R22.5	16	146/143 L	9.00	3000	2725	6610	6005	830	830	120	120	23.5	1020	298
•	•	285/75R24.5	14	144/141 L	8.25	2800	2575	6175	5675	760	760	110	110	23.5	1056	283
•	•	285/75R24.5	16	147/144 L	8.25	3075	2800	6780	6175	830	830	120	120	23.5	1056	283

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD577



High Durability



High Strength



Excellent Grip



- High wear resistance
- More fuel-efficient
- Good cost-performance

Suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	265/70R19.5	18	143/141 J	7.50	2725	2575	6005	5675	900	900	130	130	15.5	867	262
•	285/70R19.5	18	150/148 K	8.25	3350	3150	7390	6945	900	900	130	130	16	895	283
•	275/70R22.5	16	148/145 M	8.25	3150	2900	6940	6395	900	900	130	130	18	958	276
•	275/80R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	22	1012	276
•	295/60R22.5	18	150/147 L	9.00	3350	3075	7390	6780	900	900	130	130	18	926	292
•	315/60R22.5	18	152/148 L	9.75	3550	3150	7825	6945	900	900	130	130	18	950	313
•	315/70R22.5	18	156/150 L	9.00	4000	3350	8820	7385	900	900	130	130	19	1014	312
•	315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	20	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD727



- Cut resistant
- Excellent traction
- High scrub resistance




Suitable



Origin CN/VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
• ^{NEW}	9.5R17.5	18	143/141	K	6.75	2725	2575	6005	5675	875	875	125	125	16.5	850	240
•	11R22.5	18	148/145	L	8.25	3150	2900	6940	6395	850	850	123	123	22.5	1059	279
•	12R22.5	18	152/149	K	9.00	3550	3250	7830	7160	930	930	135	135	20.5	1096	300
•	11R24.5	16	149/146	L	8.25	3250	3000	7160	6610	830	830	120	120	22.5	1110	279
•	225/80R17.5	18	123/122	L	6.75	1550	1500	3415	3305	700	700	102	102	14	811	226
• ^{NEW}	265/70R19.5	18	143/141	K	7.50	2725	2575	6005	5675	900	900	130	130	15	873	262
• ^{NEW}	275/70R22.5	18	148/145	M	8.25	3150	2900	6940	6395	900	900	130	130	17	958	276
• ^{NEW}	295/80R22.5	18	152/149	L	9.00	3550	3250	7825	7165	900	900	130	130	17	1044	298
• ^{NEW}	325/95R24	22	162/160	K	9.00	4750	4500	10500	9920	850	850	123	123	20	1228	325

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY719



- Cut resistant
- Excellent traction
- High scrub resistance



Suitable



Origin CN/VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	9.5R17.5	18	143/141	K	6.75	2725	2575	6005	5675	875	875	125	125	17	850	240
•	12R22.5	18	152/149	K	9.00	3550	3250	7830	7160	930	930	135	135	21	1096	300
•	265/70R19.5	18	143/141	K	7.50	2725	2575	6005	5675	900	900	130	130	15	873	262
•	315/80R22.5	20	157/154	J	9.00	4125	3750	9090	8270	900	900	130	130	19	1076	312
•	325/95R24	20	160/157	K	9.00	4500	4125	9920	9090	900	900	130	130	20	1228	325
•	7.00R16LT	14	118/114	L	5.50F	1320	1180	2910	2600	770	770	110	110	14	775	205
•	7.50R16LT	14	122/118	L	6.00G	1500	1320	3310	2910	770	770	110	110	15.5	815	215
•	8.25R16LT	16	128/124	L	6.50H	1800	1600	3970	3530	770	770	110	110	15.5	865	235
•	10.00R20	18	149/146	K	7.50	3250	3000	7160	6610	930	930	135	135	19	1065	278
•	11.00R20	18	152/149	K	8.00	3550	3250	7830	7160	930	930	135	135	20	1096	293
•	12.00R20	18	154/151	K	8.50	3750	3450	8270	7610	830	830	120	120	21	1136	315
•	12.00R20	20	156/153	K	8.50	4000	3650	8820	8820	900	900	130	130	21	1136	315
•	8.25R20	16	139/137	K	6.50	2430	2300	5360	5070	930	930	135	135	17	974	236
•	9.00R20	16	144/142	K	7.00	2800	2650	6170	5840	900	900	130	130	18	1030	259
•	12.00R24	20	160/157	K	8.50	4500	4125	9920	9090	900	900	130	130	20	1238	315
•	12.00R24	22	162/160	K	8.50	4750	4500	10470	9920	930	930	135	135	20	1238	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD720



- Better grip
- Excellent traction
- Tread chunking resistance



Suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	14	144/142 L	8.25	2800	2650	6175	5840	720	720	105	105	21.5	1059	279
•	11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	21.5	1059	279
•	11R24.5	14	146/143 L	8.25	3000	2725	6610	6005	720	720	105	105	21.5	1110	279
•	11R24.5	16	149/146 L	8.25	3250	3000	7160	6610	830	830	120	120	21.5	1110	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD721



- Cut resistant
- Excellent traction
- High scrub resistance



Suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	146/143 K	8.25	3000	2725	6610	6005	830	830	120	120	24.5	1059	279
•	11R24.5	16	149/146 K	8.25	3250	3000	7160	6610	830	830	120	120	24.5	1110	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD755



- High durability
- Excellent traction
- High scrub resistance




Suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
• •	11R22.5	16	148/145 J	8.25	3150	2900	6945	6395	840	840	120	120	19	1059	279
• •	12R22.5	18	152/149 K	9.00	3550	3250	7825	7165	930	930	135	135	20.5	1096	300
• •	13R22.5	20	156/150 J	9.75	4000	3350	8820	7390	900	900	130	130	22.5	1124	320
• •	315/80R22.5	20	156/153 K	9.00	4000	3650	8820	8045	850	850	125	125	22	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD758

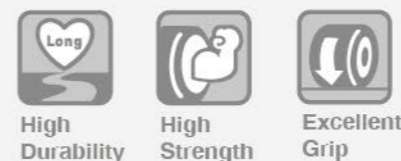

- High durability
- Cutting resistance
- Strong loading capacity



Suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
• •	11R22.5	16	148/145 K	8.25	3150	2900	6945	6395	840	840	120	120	19	1059	279
• •	12R22.5	18	152/149 K	9.00	3550	3250	7825	7165	930	930	135	135	20.5	1096	300
• •	13R22.5	20	156/150 J	9.75	4000	3350	8820	7390	900	900	130	130	20	1124	320
•	295/80R22.5	18	152/149 K	9.00	3550	3250	7825	7165	900	900	130	130	18	1044	298
• •	315/80R22.5	20	156/150 K	9.00	4000	3350	8820	7390	850	850	125	125	21	1076	312
• •	315/80R22.5	20	156/153 K	9.00	4000	3650	8820	8045	850	850	125	125	21	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD660



- High durability
- High scrub resistance



Suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	13R22.5	20	156/150 K	9.75	4000	3350	8820	7390	900	900	130	130	18	1124	320

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD681



- High durability
- High scrub resistance



Suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11.00R20	18	152/149 J	8.00	3550	3250	7830	7170	930	930	135	135	20	1096	293
•	12.00R20	20	156/153 J	8.50	4000	3650	8820	8820	900	900	130	130	21	1136	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs



TRAILER

JT530



Wide Section

- High durability
- High scrub resistance



Suitable 



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
CN VN					S	D	S	D	S	D	S	D				
NEW	235/75R17.5	18	143/141	J	6.75	2725	2575	6005	5675	860	860	125	125	13	797	233
NEW	245/70R17.5	18	143/141	J	7.50	2725	2575	6005	5675	875	875	125	125	13	789	248
NEW	245/70R19.5	18	144/142	J	7.50	2800	2650	6175	5840	900	900	130	130	13.5	839	248

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs


JT560



High Speed



High Durability



Wide tread and four straight groove pattern provides excellent handling, safety, and water drainage.

Wear-resistance rubber and optimised pattern design ensure longer mileage.

Optimized tire shoulder and unique notch design effectively reduce abnormal tread wear.



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)	(lbs)	(kPa)	(PSI)			
•	•	435/50R19.5	20	160 J	14.00	4500	9920	900	130	12.5	931	438
•	•	435/50R19.5	20	160 L	14.00	4500	9920	900	130	12.5	931	438
•	•	445/45R19.5	20	160 J	15.00	4500	9920	900	130	13	895	446
•	•	445/45R19.5	20	160 L	15.00	4500	9920	900	130	13	895	446
•	•	385/55R22.5	20	160 K	12.25	4500	9920	900	130	14.5	996	386
•	•	385/65R22.5	20	160 K	11.75	4500	9920	900	130	15.5	1072	389
•	•	385/65R22.5	24	164 K	11.75	5000	11000	900	130	15.5	1072	389
•	•	425/65R22.5	20	165 K	12.25	5150	11400	830	120	15.5	1124	422

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JT578



High Speed



Reduced Noise



High Durability



High Strength

- Low noise emissions
- High wear-resistance
- Good cost performance
- Reduced fuel consumption



Suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
		S	D	S	D	S	D	S	D	S	D					
•	•	11R22.5	16	148/145 M	8.25	3150	2900	6945	6395	840	840	120	120	15	1054	279
•	•	12R22.5	18	152/149 L	9.00	3550	3250	7825	7165	930	930	135	135	15	1085	300
•	•	325/95R24	22	162/160 K	9.00	4750	4500	10500	9920	850	850	123	123	15	1228	325

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JT586

- High Speed
- Reduced Noise
- High Durability
- High Strength

- Long tread life
- Good cost performance
- Reduced fuel consumption



Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	10.00R20	18	149/146 K	7.50	3250	3000	7160	6610	930	930	135	135	15.5	1054	278
•	11.00R20	18	152/149 K	8.00	3550	3250	7170	7160	930	930	135	135	16	1085	293
•	12.00R20	18	154/151 K	8.50	3750	3450	8270	7610	830	830	120	120	16.5	1125	315
•	12.00R20	20	156/153 K	8.50	4000	3650	8820	8820	900	900	130	130	16.5	1125	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY598

- High Speed
- High Durability

- Cool running
- High Durability



Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)	(lbs)	(kPa)	(PSI)				
					CN	VN						
•	•	385/65R22.5	20	160 K	11.75	4500	9920	900	130	17.5	1072	389
•	•	385/65R22.5	24	164 K	11.75	5000	11000	900	130	17.5	1072	389
•	•	425/65R22.5	20	165 K	12.25	5150	11400	830	120	16.5	1124	422

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

ALL-POSITION

JA626



Reduced Noise



High Durability



High Strength

- Cool running
- Excellent durability




Suitable 



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)	(lbs)	(kPa)	(PSI)			
•		385/65R22.5	20	164 K	11.75	5000	11000	900	130	17.5	1072	389
•		385/65R22.5	24	164 K	11.75	5000	11000	900	130	17.5	1072	389
•	•	425/65R22.5	20	165 K	12.25	5150	11400	830	120	17.5	1124	422
•		445/65R22.5	20	169 K	13.00	5800	12800	900	130	17.5	1150	444

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD690

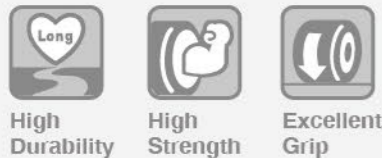

- Cool running
- High wear-resistance




Suitable



Origin CN/VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	7.00R16LT	14	118/114 L	5.50F	1320	1180	2910	2600	770	770	110	110	11.5	775	205
•	7.50R16LT	14	122/118 L	6.00G	1500	1320	3310	2910	770	770	110	110	12.5	815	215
•	8.25R16LT	16	128/124 L	6.50H	1800	1600	3970	3530	770	770	110	110	13.5	865	235
•	10.00R20	18	149/146 K	7.50	3250	3000	7165	6610	930	930	135	135	16	1065	278
•	11.00R20	18	152/149 K	8.00	3550	3250	7830	7160	930	930	135	135	17.5	1096	293
•	12.00R20	18	154/151 K	8.50	3750	3450	8270	7610	830	830	120	120	18	1136	315
•	12.00R20	20	156/153 K	8.50	4000	3650	8820	8050	900	900	130	130	18	1136	315
•	8.25R20	16	139/137 K	6.50	2430	2300	5360	5070	930	930	135	135	15	974	236
•	9.00R20	16	144/142 K	7.00	2800	2650	6170	5840	900	900	130	130	15.5	1030	259

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA767

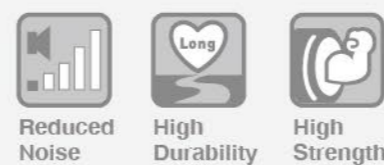

- Cool running
- Excellent durability



Suitable



Origin CN/VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	215/75R17.5	18	135/133 L	6.00	2180	2060	4805	4540	860	860	125	125	15	773	211
•	265/70R19.5	18	143/141 J	7.50	2725	2575	6005	5675	900	900	130	130	15	873	262
•	275/80R22.5	18	149/146 L	8.25	3250	3000	7160	6610	900	900	130	130	18.5	1012	276
•	295/80R22.5	18	152/149 L	9.00	3550	3250	7825	7165	900	900	130	130	18	1044	298

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA511

- Reduced Noise
- High Durability
- High Strength
- Wide Section



· All-position tire made for light trucks and commercial vehicles.

Suitable



Origin	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	6.50R16LT	12	110/105 L	5.50F	1060	925	2335	2040	670	670	97	97	10.5	750	185
•	7.00R16LT	14	118/114 L	5.50F	1320	1180	2910	2600	770	770	110	110	11.5	775	205
• •	7.50R16LT	14	122/118 L	6.00G	1500	1320	3310	2910	770	770	110	110	12.5	805	215
•	8.25R16LT	16	128/124 L	6.50H	1800	1600	3970	3530	770	770	110	110	13.5	855	235

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY601

- Reduced Noise
- High Durability



· Cool running
· High durability

Suitable



Origin	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
• •	11R22.5	16	148/145 M	8.25	3150	2900	6945	6395	840	840	120	120	16	1054	279
•	12R22.5	18	152/148 K	9.00	3550	3150	7825	6945	850	850	125	125	16.5	1085	300
•	13R22.5	18	154/150 L	9.75	3750	3350	8270	7390	850	850	125	125	16	1124	320
•	11R24.5	16	149/146 M	8.25	3250	3000	7160	6610	830	830	120	120	16	1104	279
•	295/80R22.5	18	152/149 L	9.00	3550	3250	7825	7165	900	900	130	130	17.5	1044	298
•	315/80R22.5	20	156/153 K	9.00	4000	3650	8820	8045	850	850	125	125	14	1076	312
•	^{NEW} 325/95R24	22	162/160 K	9.00	4750	4500	10500	9920	850	850	123	123	15.5	1228	325
•	7.00R16LT	14	118/114 L	5.50F	1320	1180	2910	2600	770	770	110	110	11.5	775	205
• •	7.50R16LT	14	122/118 L	6.00G	1500	1320	3310	2910	770	770	110	110	12.5	805	215
•	8.25R16LT	16	128/124 L	6.50H	1800	1600	3970	3530	770	770	110	110	12.5	855	235
•	10.00R20	18	149/146 K	7.50	3250	3000	7165	6610	930	930	135	135	16	1054	278
•	11.00R20	18	152/149 K	8.00	3550	3250	7830	7170	930	930	135	135	16.5	1085	293
•	12.00R20	18	154/151 K	8.50	3750	3450	8270	7610	830	830	120	120	17	1125	315
•	12.00R20	20	156/153 K	8.50	4000	3650	8820	8820	900	900	130	130	17	1125	315
•	8.25R20	16	139/137 K	6.50	2430	2300	5360	5070	930	930	135	135	13.5	974	236
•	9.00R20	16	144/142 K	7.00	2800	2650	6170	5840	900	900	130	130	15	1019	259
•	12.00R24	20	160/157 K	8.50	4500	4125	9925	9100	900	900	130	130	15.5	1226	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY602



- Cool running
- High durability




Suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	6.50R16LT	12	110/105 L	5.50F	1060	925	2340	2040	670	670	97	97	10.5	750	185
•	10.00R20	18	149/146 K	7.50	3250	3000	7165	6610	930	930	135	135	16	1054	278
•	11.00R20	18	152/149 K	8.00	3550	3250	7830	7170	930	930	135	135	17	1085	293
•	12.00R20	22	158/155 K	8.50	4250	3875	9370	8540	970	970	140	140	17	1125	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY566

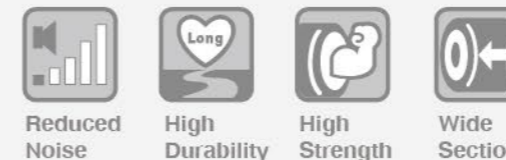

- Cool running
- High durability
- Long tread life



Suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	146/143 L	8.25	3000	2725	6610	6010	830	830	120	120	16	1054	279
•	12R22.5	18	152/149 K	9.00	3550	3250	7825	7165	930	930	135	135	18	1085	300
•	13R22.5	18	154/151 K	9.75	3750	3450	8270	7605	830	830	120	120	18	1124	320
•	295/80R22.5	18	152/149 M	9.00	3550	3250	7825	7165	850	850	125	125	17.5	1044	298
•	315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	17	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA525

- Reduced Noise
- High Durability
- High Strength

· Medium and long mileage trucks running on paved roads and highways



Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
CN/VN	10.00R20	18	149/146 K	7.50	3250	3000	7165	6610	930	930	135	135	15	1054	278

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA526

- High Speed
- High Durability

· Cut resistant
· High scrub resistance



Suitable



Origin	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
CN/VN	325/95R24	22	162/160 K	9.00	4750	4500	10500	9920	850	850	123	123	16	1228	325
CN/VN	12.00R24	20	160/157 K	8.50	4500	4125	9920	9090	900	900	130	130	16	1226	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA661



- An all-position tire made for medium and short distances on paved roads.
- Special tread compound formulation provides high wear-resistance.
- Used on heavy duty trucks, the increased bead strength design helps prevent abnormal wear.




Suitable



Origin CN/VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
• •	325/95R24	22	162/160 K	9.00	4750	4500	10500	9920	850	850	123	123	15.5	1228	325

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JA665



- High durability
- High scrub resistance



Suitable



Origin CN/VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	146/143 K	8.25	3000	2725	6610	6005	830	830	120	120	17.5	1054	279
•	11R22.5	16	148/145 L	8.25	3150	2900	6940	6395	850	850	123	123	17.5	1054	279
• •	12R22.5	18	152/149 K	9.00	3550	3250	7825	7165	930	930	135	135	18	1085	300
• •	13R22.5	18	156/150 L	9.75	4000	3350	8820	7385	875	875	125	125	18	1124	320
• •	13R22.5	20	156/150 L	9.75	4000	3350	8820	7390	900	900	130	130	18	1124	320
•	11R24.5	16	149/146 L	8.25	3250	3000	7160	6610	830	830	120	120	17.5	1104	279
•	295/80R22.5	18	152/149 K	9.00	3550	3250	7825	7165	900	900	130	130	18.5	1044	298
•	315/80R22.5	20	156/153 K	9.00	4000	3650	8820	8045	850	850	125	125	17	1076	312
• •	315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	17	1076	312
•	12.00R24	20	160/157 K	8.50	4500	4125	9920	9090	900	900	130	130	14.5	1226	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD756



- Excellent traction
- High scrub resistance




Suitable



Origin CN/VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	148/145 G	8.25	3150	2900	6940	6395	850	850	123	123	24	1065	279
•	12R22.5	18	152/149 G	9.00	3550	3250	7830	7160	930	930	135	135	24	1096	300
•	13R22.5	18	156/150 G	9.75	4000	3350	8820	7390	900	900	130	130	24	1124	320
•	11R24.5	16	149/146 G	8.25	3250	3000	7160	6610	830	830	120	120	23.5	1116	279
•	295/80R22.5	18	152/149 J	9.00	3550	3250	7825	7165	900	900	130	130	24	1044	298
•	315/80R22.5	20	157/154 G	9.00	4125	3750	9090	8270	900	900	130	130	24	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD766



- High durability
- Excellent traction
- High scrub resistance



Suitable



Origin CN/VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	12.00R24	20	160/157 D	8.50	4500	4125	9920	9090	900	900	130	130	31	1238	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JD785



- High durability
- Impact-resistant
- Reduce stone retention



Suitable



Origin CN/VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	7.50R16LT	14	122/118 D	6.00G	1500	1320	3310	2910	770	770	110	110	18.5	815	215
•	8.25R16LT	18	128/124 D	6.50H	1800	1600	3970	3530	770	770	110	110	20.5	865	235
•	10.00R20	20	149/146 D	7.50	3250	3000	7165	6610	930	930	135	135	23.5	1065	278
•	11.00R20	18	152/149 D	8.00	3550	3250	7830	7160	930	930	135	135	24	1096	293
•	12.00R20	20	156/153 D	8.50	4000	3650	8820	8820	900	900	130	130	24	1136	315
•	12.00R20	22	158/155 D	8.50	4250	3875	9370	8540	970	970	140	140	24	1136	315
•	8.25R20	16	139/137 D	6.50	2430	2300	5360	5070	930	930	135	135	20	974	236
•	9.00R20	18	144/142 D	7.00	2800	2650	6170	5840	900	900	130	130	22	1030	259

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY716



- Excellent traction
- Tread chunking resistance



Suitable



Origin CN/VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	13R22.5	20	156/150 J	9.75	4000	3350	8820	7390	900	900	130	130	21	1124	320
•	10.00R20	18	149/146 K	7.50	3250	3000	7160	6610	930	930	135	135	21	1065	278
•	11.00R20	18	152/149 K	8.00	3550	3250	7830	7160	930	930	135	135	21	1096	293
•	12.00R20	18	154/151 K	8.50	3750	3450	8270	7610	830	830	120	120	21	1136	315
•	12.00R20	22	158/155 D	8.50	4250	3875	9370	8540	970	970	140	140	21	1136	315
•	12.00R24	20	160/157 K	8.50	4500	4125	9920	9090	900	900	130	130	21.5	1238	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs



COACH

COACH



Reduced Noise



High Durability



High Strength

- Long tread life
- High durability
- Low noise emissions
- Uniform wear performance



Suitable 



Origin CN VN	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	295/80R22.5	18	152/149 M	9.00	3550	3250	7825	7165	930	930	135	135	15	1044	298

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JY529



Reduced Noise



High Durability



High Strength

- High durability
- Long tread life
- Low noise emissions
- Uniform wear performance



Suitable




Origin CN/VN	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	295/80R22.5	18	152/148	M	9.00	3550	3150	7825	6945	850	850	125	125	15	1044	298

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG~2.2lbs



Urban

JU555

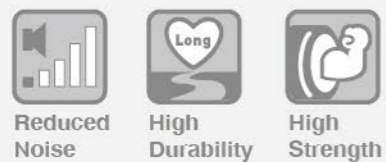

- Excellent grip
- High durability
- Enhanced sidewall




Suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
• •	11R22.5	16	148/145 J	8.25	3150	2900	6940	6395	850	850	123	123	20	1054	279
• •	11R22.5	18	148/145 J	8.25	3150	2900	6940	6395	850	850	123	123	20	1054	279
•	245/70R19.5	14	133/131 M	7.50	2060	1950	4540	4300	760	760	110	110	17.5	839	248
•	245/70R19.5	16	136/134 M	7.50	2240	2120	4940	4675	830	830	120	120	17.5	839	248
•	245/70R19.5	18	144/142 J	7.50	2800	2650	6175	5840	900	900	130	130	17.5	839	248
• •	275/70R22.5	18	148/145 J	8.25	3150	2900	6940	6395	900	900	130	130	20.5	958	276
•	305/70R22.5	18	152/150 J	9.00	3550	3350	7830	7390	900	900	130	130	20.5	1000	305
•	305/70R22.5	20	153/150 J	9.00	3650	3350	8050	7390	900	900	130	130	20.5	1000	305

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JU551

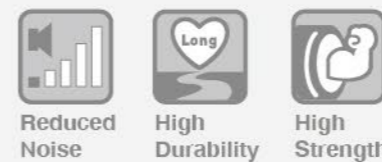

- Excellent durability
- High scrub resistance



Suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	148/145 L	8.25	3150	2900	6940	6395	850	850	123	123	20.5	1054	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JU558



Reduced Noise



High Durability



High Strength

- Excellent grip
- High durability
- Enhanced sidewall



Suitable



Origin CN VN	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	10R22.5	16	144/142 L	7.50	2800	2650	6175	5840	900	900	130	130	16.5	1020	254

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG~2.2lbs



Winter

JW590



High Durability



Excellent Grip

- Excellent traction
- Good cost performance



Suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	20	1054	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JW591



High Durability



Excellent Grip

- Excellent traction
- Good cost performance



Suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	20	1054	279
•	225/80R17.5	14	123/122 L	6.75	1550	1500	3415	3305	700	700	102	102	16	811	226
•	225/80R17.5	14	129/127 K	6.75	1850	1750	4080	3860	700	700	102	102	16	811	226
•	245/70R19.5	18	144/142 J	7.50	2800	2650	6175	5840	900	900	130	130	19	839	248
•	265/70R19.5	16	140/138 L	7.50	2500	2360	5510	5205	760	760	110	110	20	867	262
•	265/70R19.5	16	140/138 M	7.50	2500	2360	5510	5205	760	760	110	110	20	867	262
•	275/80R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	19	1012	276

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JW592



High Durability



Excellent Grip



- Excellent grip on ice and snow
- High driving performance on ice and snow roads
- Good braking performance on ice and snow pavement

Suitable



Origin	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
NEW	275/70R22.5	16	148/145 L	8.25	3150	2900	6940	6395	900	900	130	130	20.5	958	276
NEW	295/80R22.5	18	152/149 L	9.00	3550	3250	7825	7165	900	900	130	130	22	1044	298
NEW	315/70R22.5	18	156/150 L	9.00	4000	3350	8820	7385	900	900	130	130	20.5	1014	312
NEW	315/80R22.5	20	156/153 K	9.00	4000	3650	8820	8050	850	850	120	120	20	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

JW593



High Durability



Excellent Grip



- Excellent grip on ice and snow
- Continuous performance
- Good braking performance on ice and snow pavement

Suitable



Origin	Size	PR	LI/SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)	(lbs)	(kPa)	(PSI)			
					CN	VN					
NEW	385/65R22.5	24	164 K	11.75	5000	11000	900	130	15	1072	385

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs